


單向壓板
TAPPED CLAMP

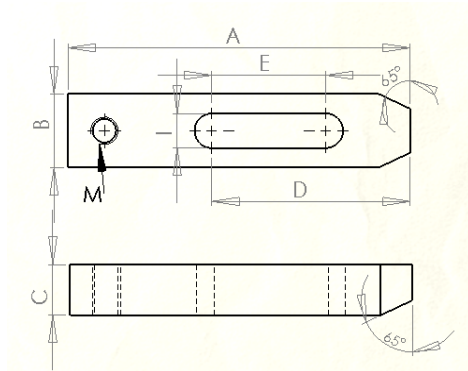

※ Material: S45C

※ Hardness of heat treatment : HRC 32±5°

※ Surface treatment: black oxide furnished

※ For single point clamping application; and supported by engaging stud into tapped thread.

Unit: mm

Order no.	M(thread spec.)	I(slot width)	A	B	C	D	E	F
TCM-84041	M12X1.75	15	80	32	19	48	23	69
TCM-84042	M12X1.75	15	100	32	19	63	38	87
TCM-84043	M12X1.75	15	150	32	22	87	50	134
TCM-85051	M16X2.0	18	80	38	19	43	15	65
TCM-85052	M16X2.0	18	100	38	19	60	30	85
TCM-85053	M16X2.0	18	150	38	22	87	50	134
TCM-87071	M20X2.5	21	100	38	25	60	30	85
TCM-87072	M20X2.5	21	150	38	25	87	50	132
TCM-87073	M20X2.5	21	200	44.5	28.5	107	70	180